

V3 RANGE USER MANUAL



Hole Size

100mm Diameter (Best Fit)
100-102mm Diameter Suitable



Outlet Configuration

Standard:
2x Power Outlets*
1x USB Power Outlet*
*Outlet options may vary per model



Model Options

V3C, V3M, V3C-UK, V3C-US



Support

Contact your local
distributor for support.
Manufactured by
Modern Power Solutions

INTRODUCTION

Features:

Anti-pinch function: the unit will automatically stop if there is an obstruction to either opening or closing the unit.

Child lock: hold down the top power button for 5 seconds to activate or deactivate the unit.

USB Charging: the V3 range of power outlet systems feature built-in USB chargers

INSTALLATION

1. Drill a hole in the required installation surface. The hole size diameter is indicated above in the model specifications.
2. Undo the mounting ring by spinning it clockwise with the unit pointing upside down.
3. Once the mounting ring is undone and removed from the unit, feed the power cable through the top of the installation hole, then place the unit inside this hole, so that it can fit flush with the bench-top.
4. Feed the mounting ring back through the cable, and tighten thoroughly to secure the unit to the bench-top.
5. Plug the power plug into an Australia power protected circuit.
6. Push the red switch on the bottom of the unit to the "on" position.
7. Press and hold down the top power button for 5 seconds to "power up" the unit.
8. The unit is ready for use. Lightly press on the top power button to open or close the unit.


SPECIFICATIONS

Model designed for use in Australia and New Zealand.

Rated current of 10A, Rated voltage of 240v, or otherwise specified.

Earth connected, with shell earth contact.

USB Power Output 5v. Refer to the product tag for model specific specifications.

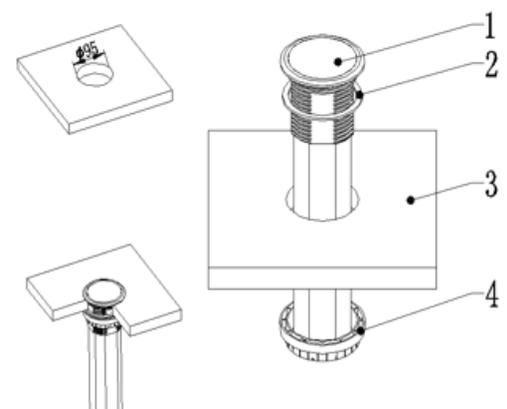

1: Top, 2: Silicon Pad / Metal Washer, 3: Bench-top, 4: Mounting Ring